

HEB breakaway and non-breakaway in-line fuse holders for UL 13/32" x 1-1/2" supplemental fuses

**Catalog Symbol: HEB*****Description:**

The Bussmann® series of HEB submersible, single-pole in-line fuse holders for UL 13/32" x 1-1/2" supplemental fuses. Available in non-breakaway and breakaway versions with an array of terminal options to meet application needs. Breakaway versions come with insulating boots to provide submersibility per UL IP67. Non-breakaway versions require ordering optional insulating boots for submersibility.

Recommended fuses:

BAF, FNM, FNQ, KLM and KTK

Ratings:

Volts: 600V

Amps: up to 30A limited by conductor size

Withstand: 200kA RMS Sym.

Agency information:

UL® Recognized, Guide IZLT2, File E14853

CSA® Certified, Class 622501, File 47235

CE, RoHS compliant[†]

Coupling nut torque:

10-20 Lb-In (1.1-2.2 N•m)

Operating and storage temperature:


-40°F (-40°C) to 221°F (105°C)

Insulating boots:


Two insulating boots come standard with the breakaway holder configurations. Insulating boots are not included as standard with non-breakaway holders. Two insulating boots must be ordered separately, if required, for each non-breakaway holder ordered. When insulating boots are utilized, extra heat retention requires that fuses are sized at a minimum of 200% of the RMS load current.

Use these part numbers to order insulating boots for a non-breakaway HEB holder:

| Description | Part number |
|------------------|-------------|
| Single conductor | 2A0660 |
| Dual conductor | 2A0661 |

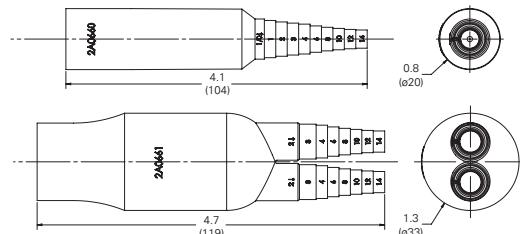Boot reference:**Installation instructions:**

Strip wire insulation equal to the depth of the crimp or screw terminal. Torque screw terminal to 35 Lb-In (3.9 N•m) or crimp terminal twice, spacing crimps a distance of one-third from each end (as shown below) using an appropriate crimp tool and die. See page 5 for recommended crimping tools.

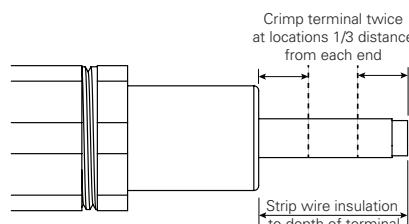
**Related products:**

| Catalog number | Description | Data sheet No. |
|----------------|---|----------------|
| HEX | Two-pole supplemental in-line fuse holder | 2126 |
| HEZ | One-pole Class CC in-line fuse holder | 2130 |
| HEY | Two-pole Class CC in-line fuse holder | 2126 |
| HET | One-pole in-line, permanently installed neutral | 2125 |
| NNB | 13/32" x 1-1/2" neutral dummy link (not a fuse) | — |

* The Bussmann series HEB in-line fuse holders are the legacy Bussmann TRON™ HEB in-line fuse holders.

† See terminal data tables for exceptions.

Non-breakaway catalog number system

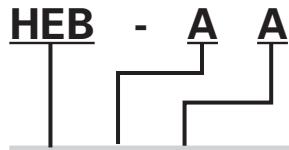

To order:


Specify catalog symbol HEB and the loadside terminal code. Then select a lineside terminal code that is available with the loadside terminal. Example: HEB-BB defines a non-breakaway holder with a loadside copper crimp terminal for a single #6 or two #10 wires with a lineside copper crimp terminal for a single #6 or two #10 wires.

| Catalog symbol | Loadside terminal | Lineside terminal | Agency Information | | Loadside terminal | Wire range* | Lineside terminal | | Reference length A | Breakaway equivalent |
|----------------|-------------------|-------------------|--------------------|-----|-------------------|------------------|-------------------|--------------------|--------------------|----------------------|
| | | | UL | CSA | | | Terminal type | Terminal type | | |
| A | A | X X | Cu crimp | | #8-16; (2) #12-16 | Cu crimp | | #8-16; (2) #12-16 | 4.4 (112) | HEB-AW-RLC-A |
| | B | X X | Cu crimp | | #8-16; (2) #12-16 | Cu crimp | | #6; (2) #10 | 4.4 (112) | HEB-AW-RLC-B |
| | C | X X | Cu crimp | | #8-16; (2) #12-16 | Cu crimp | | #4 str; (2) #8 | 4.7 (119) | HEB-AW-RLC-C |
| | D | X X | Cu crimp | | #8-16; (2) #12-16 | Cu crimp | | #2 str; (2) #6 | 4.7 (119) | — |
| | J | X — | Cu crimp | | #8-16; (2) #12-16 | Cu setscrew | | #3-12 | 4.7 (119) | HEB-AW-RLC-J |
| | K | X — | Cu crimp | | #8-16; (2) #12-16 | Cu dual setscrew | | #2-12 [†] | 4.8 (122) | HEB-AW-RYC |
| | R | — — | Cu crimp | | #8-16; (2) #12-16 | Al crimp | | #1-2 | 4.9 (124) | — |
| | L | — — | Cu crimp | | #8-16; (2) #12-16 | Al setscrew | | #2-12 | 4.7 (119) | HEB-AW-RLA |
| | W | — — | Cu crimp | | #8-16; (2) #12-16 | Cu solid | | — | 4.4 (112) | — |
| | Y | — — | Cu crimp | | #8-16; (2) #12-16 | Al dual setscrew | | #2-12 [†] | 4.8 (122) | HEB-AW-RYA |
| HEB | A | X X | Cu crimp | | #6; (2) #10 | Cu crimp | | #8-16; (2) #12-16 | 4.4 (112) | HEB-BW-RLC-A |
| | B | X X | Cu crimp | | #6; (2) #10 | Cu crimp | | #6; (2) #10 | 4.4 (112) | HEB-BW-RLC-B |
| | C | X X | Cu crimp | | #6; (2) #10 | Cu crimp | | #4 str; (2) #8 | 4.7 (119) | — |
| | D | X X | Cu crimp | | #6; (2) #10 | Cu crimp | | #2 str; (2) #6 | 4.7 (119) | — |
| | W | — — | Cu crimp | | #6; (2) #10 | Cu solid | | — | 4.4 (112) | — |
| | C | C X X | Cu crimp | | #4 str; (2) #8 | Cu crimp | | #4 str; (2) #8 | 5 (127) | — |
| | D | D X X | Cu crimp | | #2 str; (2) #6 | Cu crimp | | #2 str; (2) #6 | 5 (127) | — |
| | Z | A — — | Cu crimp | | #18-20 | Cu crimp | | #8-16; (2) #12-16 | 4.4 (112) | — |
| | J | X — | Cu setscrew | | #3-12 | Cu setscrew | | #3-12 | 5 (127) | HEB-JW-RLC-J |
| | K | X — | Cu setscrew | | #3-12 | Cu dual setscrew | | #2-12 [†] | 5.1 (129) | HEB-JW-RYC |
| J | L | — — | Cu setscrew | | #3-12 | Al setscrew | | #2-12 | 5 (127) | — |
| | W | — — | Cu setscrew | | #3-12 | Cu solid | | — | 4.8 (122) | — |
| | Y | — — | Cu setscrew | | #3-12 | Al dual setscrew | | #2-12 [†] | 5.1 (129) | — |


* Solid,stranded conductors unless otherwise noted.

[†] Not dual wire rated. One wire per opening.

Non-breakaway dimensions - in (mm):

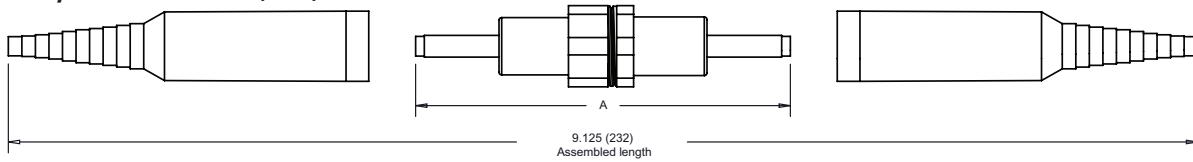

Non-breakaway catalog number system

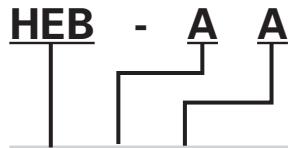

| Catalog symbol | Loadside terminal | Lineside terminal | Agency Information | | Loadside terminal | | Lineside terminal | | Reference length A | Breakaway equivalent |
|----------------|-------------------|-------------------|--------------------|-----|-------------------|------------------|-------------------|------------------|--------------------|----------------------|
| | | | UL | CSA | Terminal type | Wire range* | Terminal type | Wire range* | | |
| HEB | L | L | — | — | Al setscrew | #2-12 | Al setscrew | #2-12 | 5 (127) | HEB-LW-RLA |
| | N | N | — | — | Al crimp | 6 sol; 8 str | Al crimp | #6 sol; #8 str | 5.4 (137) | — |
| | P | P | — | X | Al crimp | 4 sol; 6 str | Al crimp | #4 sol; #6 str | 5.4 (137) | — |
| | Q | Q | — | X | Al crimp | #2 sol; #3-4 str | Al crimp | #2 sol; #3-4 str | 5.4 (137) | — |
| | R | R | — | X | Al crimp | #1-2 str | Al crimp | #1-2 str | 5.4 (137) | — |
| | T | T | — | X | Al crimp | 1/0 str | Al crimp | 1/0 str | 5.4 (137) | — |
| | W | W | — | — | Cu solid | — | Cu solid | — | 4.4 (112) | — |

* Solid/stranded conductors unless otherwise noted.

Non-Breakaway terminal data


| Terminal type | Conductor data | | | | Catalog symbol [Load/Line] |
|-------------------------|----------------|------------------|-------|----------|----------------------------|
| | Size | No. per terminal | Solid | Stranded | |
| Cu crimp | #8-16 | 1 | • | • | A |
| | #10-16 | 2 | • | • | |
| | #6 | 1 | • | • | B |
| | #10 | 2 | • | • | |
| | #4 | 1 | — | • | C† |
| | #8 | 2 | • | • | |
| | #2 | 1 | — | • | D†† |
| | #6 | 2 | • | • | |
| | #18-20 | 1 | • | • | Z |
| Cu setscrew | #3-12 | 1 | • | • | J |
| Cu dual setscrew | #2-12 | 2 [†] | • | • | K |
| Cu solid | — | — | — | — | W |

† Not dual wire rated. One wire per opening.

†† Fuse holder assemblies using this terminal are not RoHS compliant.

| Terminal type | Conductor data | | | | Catalog symbol [Load/Line] |
|-------------------------|----------------|------------------|-------|----------|----------------------------|
| | Size | No. per terminal | Solid | Stranded | |
| Al crimp | #8 | 1 | — | • | N |
| | #6 | 1 | • | — | |
| | #6 | 1 | — | • | P |
| | #4 | 1 | • | — | |
| | #3-4 | 1 | — | • | Q |
| | #2 | 1 | • | — | |
| | #1-2 | 1 | — | • | R |
| | #1/0 | 1 | — | • | T |
| Al setscrew | #2-12 | 1 | • | • | L |
| Al dual setscrew | #2-12 | 2 [†] | • | • | Y |

Breakaway catalog number system

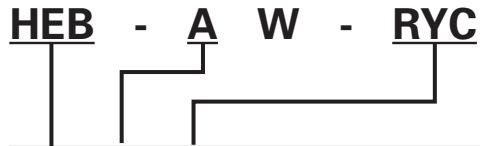

To order:


Specify catalog symbol HEB and the loadside terminal code plus the letter "W." Then select a lineside terminal code that is available with the loadside terminal. Example: HEB-BW-RCL-B defines a breakaway holder with a loadside copper crimp terminal for a single #6 or two #10 wires with a lineside copper crimp terminal for a single #6 or two #10 wires.

| Catalog symbol | Loadside terminal | Lineside terminal | Agency Information | | Loadside terminal | | Lineside terminal | | Length A (reference) | Non-breakaway equivalent |
|----------------|-------------------|-------------------|--------------------|-----|-------------------|----------------------|-------------------|----------------------|----------------------|--------------------------|
| | | | UL | CSA | Terminal type | Wire range* | Terminal type | Wire range* | | |
| HEB | A | RLC-A | X | X | Cu crimp | #8-16; (2) #12-16 | Cu crimp | #8-16; (2) #12-16 | 5.8 (147) | HEB-AA |
| | | RLC-B | X | — | Cu crimp | #8-16; (2) #12-16 | Cu crimp | #6; (2) #10 | 5.9 (150) | HEB-AB |
| | | RLC-C | X | — | Cu crimp | #8-16; (2) #12-16 | Cu crimp | #4 str; (2) #8 | 6.2 (158) | HEB-AC |
| | | RLC-J | X | — | Cu crimp | #8-16; (2) #12-16 | Cu setscrew | #3-12 | 6.2 (158) | HEB-AJ |
| | | RYC | X | — | Cu crimp | #8-16; (2) #12-16 | Cu dual setscrew | #2-12 [†] | 6.3 (159) | HEB-AK |
| | B | RLA | — | — | Cu crimp | #8-16; (2) #12-16 | Al setscrew | #2-12 | 6.2 (158) | HEB-AL |
| | | RYA | — | — | Cu crimp | #8-16; (2) #12-16 | Al dual setscrew | #2-12 [†] | 6.3 (159) | HEB-AY |
| | | RLC-A | X | — | Cu crimp | #6; (2) #10 | Cu crimp | #8-16; (2) #12-16 | 5.8 (147) | HEB-BA |
| | | RLC-B | X | — | Cu crimp | #6; (2) #10 | Cu crimp | 6#; (2) #10 | 5.9 (150) | HEB-BB |
| | | RYC | X | — | Cu crimp | #6; (2) #10 | Cu dual setscrew | #2-12 [†] | 6.3 (159) | — |
| HEB | J | RLC-J | X | — | Cu setscrew | #3-12 | Cu setscrew | #3-12 | 6.2 (158) | HEB-JJ |
| | | RYC | X | — | Cu setscrew | #3-12 | Cu dual setscrew | #2-12 [†] | 6.3 (159) | HEB-JK |
| | K | RLC-J | X | — | Cu dual setscrew | #2-12 [†] | Cu setscrew | #3-12 | 6.2 (158) | — |
| | | RYC | X | — | Cu dual setscrew | #2-12 [†] | Cu dual setscrew | #2-12 [†] | 6.3 (159) | — |
| | L | RLA | — | — | Al setscrew | #2-12 | Al setscrew | #2-12 | 6.2 (158) | HEB-LL |
| HEB | L | RLC-J | — | — | Al setscrew | #2-12 | Cu setscrew | #3-12 | 6.2 (158) | — |
| | | RYA | — | — | Al setscrew | #2-12 | Al dual setscrew | #2-12 [†] | 6.3 (159) | — |

* Solid/stranded conductors unless otherwise noted.

† Not dual wire rated. One wire per opening.

Dimensions - in (mm):

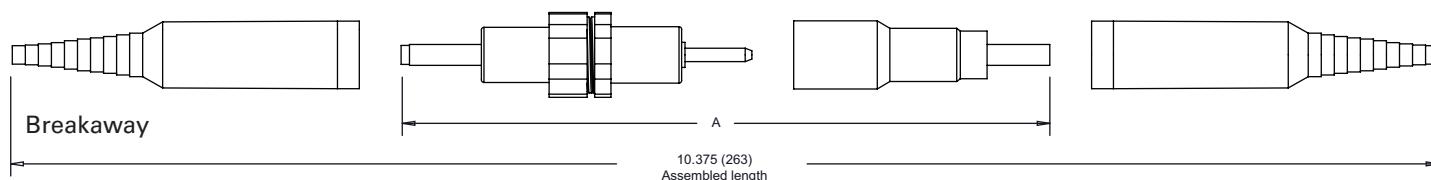

Breakaway loadside terminal data

| Terminal type | Conductor data | | | | Catalog symbol [Load /Line (2) & (3)] |
|-------------------------|----------------|------------------|-------|----------|---|
| | Size | No. per terminal | Solid | Stranded | |
| Cu crimp | | | | | |
| | #8-16 | 1 | • | • | |
| | #10-16 | 2 | • | • | A |
| | | | | | |
| | #6 | 1 | • | • | |
| | #10 | 2 | • | • | B |
| Cu setscrew | | | | | |
| | #3-12 | 1 | • | • | J |
| Cu dual setscrew | | | | | |
| | #2-12 | 2 [†] | • | • | K |
| Al setscrew | | | | | |
| | #2-12 | 1 | • | • | L |

[†] Not dual wire rated. One wire per opening.

^{††} Fuse holder assemblies using this terminal are not RoHS compliant.

Breakaway lineside terminal data

| Terminal type | Conductor data | | | | Catalog symbol |
|-------------------------|----------------|------------------|-------|----------|----------------------|
| | Size | No. per terminal | Solid | Stranded | |
| Cu crimp | | | | | |
| | #8-16 | 1 | • | • | -RLC-A |
| | #12-16 | 2 | • | • | |
| | | | | | |
| | #6 | 1 | • | • | -RLC-B |
| | #10 | 2 | • | • | |
| | | | | | |
| | #4 | 1 | — | • | -RLC-C ^{††} |
| | #8 | 2 | • | • | |
| Cu setscrew | | | | | |
| | #3-12 | 1 | • | • | -RLC-J |
| Cu dual setscrew | | | | | |
| | #2-12 | 2 [†] | • | • | -RYC |
| Al setscrew | | | | | |
| | #2-12 | 1 | • | • | -RLA |
| Al dual setscrew | | | | | |
| | #2-12 | 2 [†] | • | • | -RYA |

Recommended crimping tools:

A wide variety of crimping tools can be used with the HEB fuse holders. Some of the commercially available tools are listed in the table below. This list is not intended to exclude the use of other crimping tools that can provide similar crimps or indents.

| HEB terminal | T & B P/N (Die) |
|---------------|-------------------------|
| A | WT-111M (Die C) |
| | Sta-Kon ERG4002 (Die C) |
| B | WT-115A (Die D) |
| | TBM5 (Grey Die) |
| C | WT-115A (Die E) |
| | TBM5 (Brown Die) |
| D | TBM8 (Brown Die) |
| | WT-115A (Die F) |
| Z | WT-111M (Die A) |
| | Sta-Kon ERG4002 (Die A) |
| N, P, Q, R, T | TBM8 (Orange Die) |

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
Eaton.com

Bussmann Division
1114 Old State Road
Ellisville, MO 63021
United States
Eaton.com/bussmannseries

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 2127 - BU-SB15154
October 2015

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.
UL is a registered trademark of the Underwriters Laboratories, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[HEB-AA](#)